
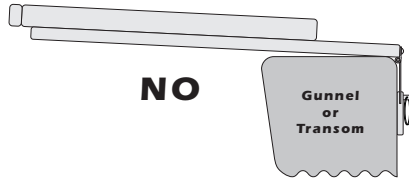
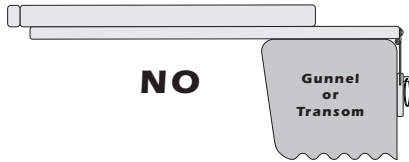


# MOUNTING INSTRUCTIONS

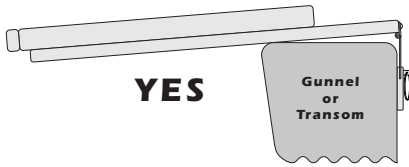

## CONTENTS

- Polyethylene Bait & Filet Table with Stainless Steel Hinged Mount
- Polyethylene Mounting Pad
- Stainless Steel Push/Pull Pin
- (2) Stainless Steel Mounting Screws (#10 x 1" oval head self-tapping)

1. Assemble table to mounting pad and insert pin per illustration. Hinged mount fits into center groove of mounting pad.
2. Select desired table position on the boat. Insure table has slight angle for overboard water drainage per illustration.
3. Mark gunnel or transom where "C" touches and drill a 13/64" hole.
4. Re-position table assembly so that pin "C" is in hole just drilled.
5. Double check position of table and mounting pad. Mounting pad should be parallel with gunnel or transom. Mark screw holes "D". Drill pilot holes. Install screw "E".

Use caution when removing pin. Hold on to table. Table may fall overboard.

